

Professional line

LINITOP®



Priority to wood

Protection - Decoration - Restoration - Maintenance



linitop.com

EXTERIOR



A line of products specially designed to be long-lasting and easy to apply.

All LINITOP stains are made in international laboratories so they are valued and successfully validated by European building professionals.

They ensure the protection, durability and beauty of your outdoor wood.

Solvent-based Wood Stains



STAINABLE BASE VERSION

CLASSIC MIX

CLASSIC* and CLASSIC MIX* PROTECTIVE WOODSTAIN

Wood with limited dimensional variation

Interior Exterior	1L 2L5 5L	Coverage	Application Tools	Application Temperature	Drying time	Recoat	Clean-up
		12-16 m ² /l per coat		+ 30°C + 10°C	5h	24h	White Spirit

- High solid content. "High performance" durability.
- Thixotropic formula (gelled) to adhere better to the brush. Easy application.
- Highly flexible film, limits the risk of flaking or peeling.
- Special anti-UV pigmentation for optimal protection.
- Interior / Exterior (not subject to abrasion).
- Application on Cedar or Iroko? Contact us.

Available in: White Patina 270 • Clear 280 • Light Oak 281 • Teak 282 • Walnut 283 • Rosewood 284 • Mahogany 285 • Medium Oak 286 • Ebony 287 • Dark Oak 288 • Wenge 289 • Oregon Pine 295 • Pine 296 • Cherrywood 298.



SOLID*

WOODSTAIN WITH HIGH SOLID CONTENT FOR EXTREME CONDITIONS

Wood with limited dimensional variation

Exterior	1L 2L5 5L	Coverage	Application Tools	Application Temperature	Drying time	Recoat	Clean-up
		12-15 m ² /l per coat		+ 30°C + 10°C	4h	24h	White Spirit

- Features next generation UV filter: a UV absorber combined with a stabiliser (UV barrier).
- Double protection per coat for optimal performance.
- Thixotropic formula and highly flexible film to reduce the risk of flaking and peeling.
- Special anti-UV pigmentation for optimal protection.
- Satin appearance.
- Exterior (not subject to abrasion).
- Application on Cedar or Iroko? Contact us.

Available in: Clear 280 • Light Oak 281 • Teak 282 • Walnut 283 • Rosewood 284 • Mahogany 285 • Medium Oak 286 • Dark Oak 288 • Oregon Pine 295 • Pine 296.



PRIM & FINISH*

3-IN-1 FINISH

Cottages, Cabins, Chalets, Cladding, Screens, etc.

Exterior	1L 2L5 5L	Coverage	Application Tools	Application Temperature	Drying time	Recoat	Clean-up
		14-18 m ² /l per coat		+ 30°C + 10°C	6h	24h	White Spirit

- Multi-function system for optimal protection:
 1. Highly penetrating and long-lasting interior and exterior (3 coats) protection.
 2. Penetrating primer to improve the adhesion of LINITOP CLASSIC* and SOLID*.
 3. Coloured based prior to finishing with YACHT VERNIS* or VERNIS*.
- Transparent, microporous and protects wood from UV and the elements. Protects against greying.
- Contains an anti-fungal agent to protect the finish.
- Allows the grain of the wood to be seen and touched. Highly flake and peel resistant.
- Limits tannin stains.
- Application on Cedar or Iroko? Contact us.

Available in: Clear 280 • Light Oak 281 • Teak 282 • Walnut 283 • Rosewood 284 • Mahogany 285 • Medium Oak 286 • Ebony 287 • Dark Oak 288 • Wenge 289 • Oregon Pine 295 • Pine 296 • Cherrywood 298.

Exterior Varnish




YACHT VERNIS*

CLEAR, FLEXIBLE MARINE VARNISH

Satin or Gloss finish

Interior Exterior	0L25 0L75 2L5	Coverage	Application Tools	Application Temperature	Drying time	Recoat	Clean-up
		± 18 m ² /l per coat		+ 25°C + 10°C	5h	24h	White Spirit

- Specially designed for harsh and humid environments.
- Decorate, waterproof and protect wood from UV.
- Especially resistant to fog, snow, rain and sea water.
- Hard and soft wood except Cedar and Iroko.
- Perfect for substrates which are subject to high humidity (bathrooms) or for boats.
- Doors, frames, windows, furniture, boats (above the waterline), etc.

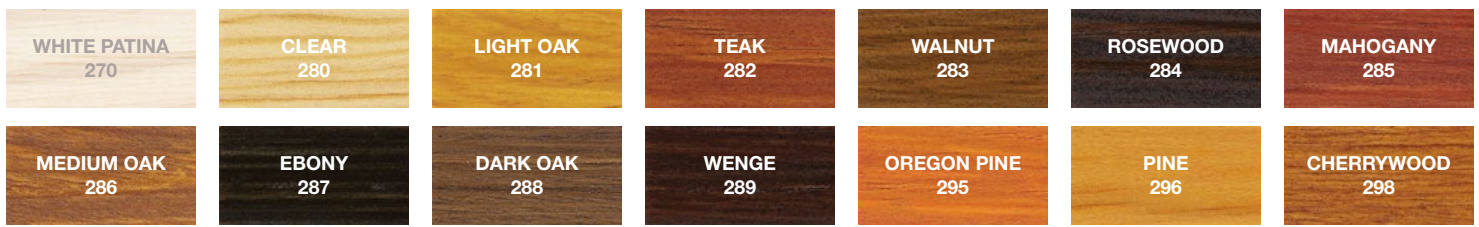

Colours can be mixed with each other.

Water-based Wood Stains



ACRYL PRIM* WATER-BASED, PENETRATING WOODSTAIN Matt Finish

Interior Exterior	1L 5L	Coverage	Application Tools	Application Temperature	Drying time	Recoat	Clean-up
		13-16 m ² /l		+ 30°C + 10°C	1h	4h	Water



- Microporous, semi-transparent, penetrating wood stain.
- Primer and finish, made from acrylic and alkyd resins. Deep protection of woods with variable dimensions.
- UV resistant. Quick drying.
- Limits tannin stains.
- Matt finish.

Available in: White Patina 270 • Clear 280 • Light Oak 281 • Teak 282 • Walnut 283 • Rosewood 284 • Mahogany 285 • Medium Oak 286 • Ebony 287 • Dark Oak 288 • Wenge 289 • Oregon Pine 295 • Pine 296 • Cherrywood 298.



CLASSIC ACRYL* DECORATIVE WOODSTAIN "Next generation" high performance

Interior Exterior	1L 5L	Coverage	Application Tools	Application Temperature	Drying time	Recoat	Clean-up
		± 14 m ² /l		+ 30°C + 10°C	2h	6h	Water



- Thixotropic for easy application and a perfect finish.
- Excellent blocking resistance.
- Microporous - Water repellent.
- Semi-transparent: enhances the wood and preserves its natural appearance.
- Highly flexible film, limits the risk of flaking or peeling.
- Special anti-UV pigmentation for optimal protection. Excellent resistance to the elements.

Available in: White Patina 270 • Clear 280 • Light Oak 281 • Teak 282 • Walnut 283 • Medium Oak 286 • Pine 296.



LINITOP COLOR MIX* OPAQUE SATIN STAIN FOR TINTING 3 bases for tinting (white, medium and clear)

Interior Exterior	1L 2L5	Coverage	Application Tools	Application Temperature	Drying time	Recoat	Clean-up
		± 12 m ² /l per coat		+ 30°C + 10°C	2h	8h	Water



- Decorates, protects. Woods structure stays visible.
- Quick drying.
- Easily to apply: Does not run.
- UV protection. Resistant to staining and washable.
- Microporous - Allows wood to breathe.
- Dry-film contains an agent to protect against mould and algae.

Impregnating Stain



LINITOP IMPREGNATION* MICROPOROUS PENETRATING STAIN High solid content

Interior Exterior	1L 5L	Coverage	Application Tools	Application Temperature	Drying time	Recoat	Clean-up
		± 16 m ² /l		+ 30°C + 10°C	5 to 7h	24h	White spirit

- Primer and finish for interior and exterior wood.
- High durability. Semi-transparent finish.


Two functions:

- 1 - Penetrating primer to increase adhesion of the finish.
- 2 - Protective stain: Application in just 2 coats.

- Dry-film contains an anti-fungal agent.
- Highly penetrating. Deep protection of the substrate. Adjusts to the woods variable dimensions.
- Can be applied on site or in a workshop.
- Application on Cedar or Iroko? Contact us.

Available in: Clear 280 • Light Oak 281 • Teak 282 • Walnut 283 • Rosewood 284 • Mahogany 285 • Medium Oak 286 • Ebony 287 • Dark Oak 288 • Wenge 289 • Pine 296.

INTERIOR

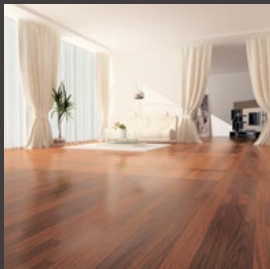



A line of "next generation" products for an optimal level of performance.

Easy to apply, they will enhance your woodwork and joinery as well as provide them with effective and long-lasting protection.

Wooden Floors



PARKET® POLYURETHANE FLOOR VARNISH Satin finish - Heavy traffic



Interior	Coverage	Application Tools	Application Temperature	Drying time	Recoat	Clean-up
 0L75 2L5	± 15 m ² /l		+ 30°C + 10°C	4h	24h	White Spirit

- Interior wooden floors and stairs made of hard or exotic wood.
- Highly resistant to wear and tear, scratches, abrasion, water, alcohol and detergents.
- Protects and enhances the natural beauty of the wood.
- Easy to wash. Does not yellow.

Varnish



ACRYL VERNIS® CLEAR POLYURETHANE ACRYLIC VARNISH Matt, Satin or Gloss finish



Interior	Coverage	Application Tools	Application Temperature	Drying time	Recoat	Clean-up
 0L25 0L75	± 12 m ² /l		+ 25°C + 10°C	1h	6h	Eau

- Protects and decorates.
- Abrasion, scratch and water resistant.
- Easy to apply. Does not blister or flake. Washable.
- Hard and softwood except Cedar and Iroko.
- Doors, frames, windows, panelling, furniture, table tops, etc.

SOLVENT-BASED VERSION



VERNIS® CLEAR POLYURETHANE VARNISH Matt, Satin or Gloss finish

Interior	Coverage	Application Tools	Application Temperature	Drying time	Recoat	Clean-up
 0L25 0L75 2L5	± 18 m ² /l		+ 25°C + 10°C	5h	24h	White Spirit

- Doors, frames, furniture, table tops, softwood paneling, hard and exotic wood.
- Beautiful decorative finish. Enhances the wood's natural beauty.
- Exceptional abrasion and scratch resistance. Easy to wash.
- Excellent brushability. May be applied to old varnish.
- Decorates, protects, water resistant.

Durieu S.A.
2 bis rue Charles de Gaulle
91070 BONDOUFLE - France
T. +33 (0)1 60 86 48 70
info@durieu.com

LINITOP® is a trademark

 www.durieu.com

Owatrol International S.L.U.
Travesera de Gracia 62, 1º5ª
08006 BARCELONA - Spain
T. +34 931 258 868
info@owatrol.com